



### SW473 Penetrating Gel Lubricant with PTFE

**DESCRIPTION:** A high tack, clear, lubricating gel which provides lubrication at temperatures from -30°F to +500°F. Penetrates as an oil to lubrication point, then forms into a tacky grease-like gel. Deposits a fine polytetrafluoroethylene and gel lubricant mixture deep inside working parts. Resists water washout and weathering. Prevents rust and corrosion while covering surfaces with a moisture proof barrier film. Safe on most plastics.


**USE ON:** Gears, sprockets, hinges, chains, cable, wire rope, slides, valves, pistons, rings, seals, bearings, sleeves, cams and bushings.

<b>SPECS:</b>	Can Size: 20 oz.
	Net Weight: 12 oz.
	Shipping Weight: 12.6 lbs.
	Packaged: 12 cans per case
	UPC Number: 0 41911 00473 2

<b>PHYSICAL CHARACTERISTICS:</b>	Color: White
	Fragrance: Solvent
	Spray Pattern: Stream
	Shelf Life: 1 Year +

<b>REGULATORY:</b>	Recyclable Packaging: Yes
	VOC Compliant CARB/OTC: Yes
	CPSC Flammability: Extremely Flammable
	24 HR. MEDICAL EMERGENCY: 1-866-836-8855

- FEATURES:**
- HIGH TACK
  - SAFE ON MOST PLASTIC
  - EFFECTIVE FROM -30°F TO +500°F

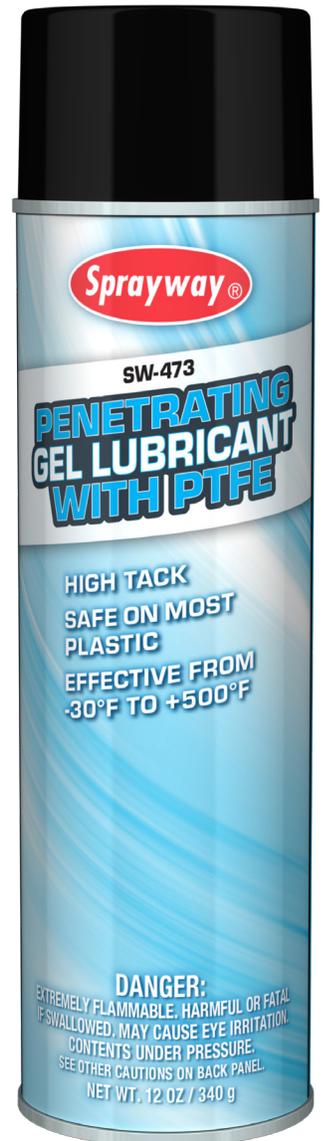

Manufactured by:  
**SPRAYWAY, INC.**

2651 Warrenville Rd. Ste 300 | Downers Grove, IL 60515  
800-332-9000 • Fax: 630-543-7797 • www.spraywayinc.com

REORDER/ITEM NUMBER SW-473